


**Heavy Rail Profiles**

Hollow Slotted Heavy Rail Profile

| Material specifications |                            |
|-------------------------|----------------------------|
| <b>Material</b>         | S235JR or equivalent steel |
| <b>Coatings</b>         | Hot-Dip Galvanized         |

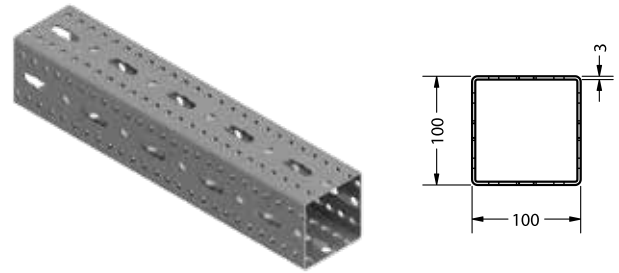

**Applications**

- Installation of heavy-duty ventilation ducts, plumbing & firefighting pipes and cable trays
- Replacement of traditional welded supports for safer and faster installation
- Primary support structure for installation of long runs of different MEP services.

**Features & Benefits**

- Slots on all four sides provides the flexibility of installation and standardizing accessories
- Hot-dip galvanized in accordance to EN 1461 assures higher corrosion protection and provides flexibility of using in Indoors as well as outdoors
- Wide range of mounting options in conjunction with FXT Heavy Rail Profile accessories
- High load bearing capacity owing to distinctive design and special material properties
- Functionally designed accessories reduces labour cost and installation time
- Better aesthetics appearance with use of FXT protection caps
- FXT Self Threading Bolts eliminates the need of nuts and washer

**Select Variant**

| Article No. | Product Description                   | W (mm) | H (mm) | t (mm) | Length (mm) |
|-------------|---------------------------------------|--------|--------|--------|-------------|
| 603011      | FXT Heavy Rail Profile 100 100 3, 6 m | 100    | 100    | 3      | 6000        |
| 603014      | FXT Heavy Rail Profile 100 100 3, 3 m | 100    | 100    | 3      | 3000        |
| 603017      | FXT Heavy Rail Profile 100 100 3, 2 m | 100    | 100    | 3      | 2000        |

**Technical Data:**

| Profile       | Unit Weight | Cross Section Area | Torsional Sectional Modulus | Torsional Moment of Inertia | Moment of Inertia (cm <sup>4</sup> ) |                                   | Section Modulus (cm <sup>3</sup> ) |                                   |
|---------------|-------------|--------------------|-----------------------------|-----------------------------|--------------------------------------|-----------------------------------|------------------------------------|-----------------------------------|
|               | (Kg)        | (mm <sup>2</sup> ) | (cm <sup>3</sup> )          | (cm <sup>4</sup> )          | I <sub>y</sub> (cm <sup>4</sup> )    | I <sub>z</sub> (cm <sup>4</sup> ) | W <sub>y</sub> (cm <sup>3</sup> )  | W <sub>z</sub> (cm <sup>3</sup> ) |
| FXT 100   100 | 7           | 750                | 56                          | 242                         | 120                                  | 120                               | 24                                 | 24                                |

**Load bearing capacities of profiles for bending around the y-axis:**

| Profile       | Bending Direction | qz (kN/m)<br>L (m) |      |      |      |      |      | Fz (kN)<br>L (m) |      |      |      |      |      |
|---------------|-------------------|--------------------|------|------|------|------|------|------------------|------|------|------|------|------|
|               | ZZ                | 1000               | 2000 | 3000 | 4000 | 5000 | 6000 | 1000             | 2000 | 3000 | 4000 | 5000 | 6000 |
| FXT 100   100 | ZZ                | 32.00              | 8.00 | 2.51 | 1.03 | 0.50 | 0.26 | 16.00            | 7.90 | 4.70 | 2.5  | 1.50 | 0.99 |

**Load bearing capacities of profiles for bending around the x-axis:**

| Profile       | Bending Direction | Fz (kN)<br>L (m) |      |      |      |      |      | Fz (kN)<br>L (m) |      |      |      |      |      |
|---------------|-------------------|------------------|------|------|------|------|------|------------------|------|------|------|------|------|
|               | ZZ                | 1000             | 2000 | 3000 | 4000 | 5000 | 6000 | 1000             | 2000 | 3000 | 4000 | 5000 | 6000 |
| FXT 100   100 | ZZ                | 12.00            | 5.90 | 2.71 | 1.52 | 0.91 | 0.58 | 8.00             | 3.90 | 1.96 | 1.10 | 0.65 | 0.40 |

**Note:**

- The determined loads apply for static loads. Calculation based on Eurocode (EC3).
- The safety coefficient = 1.35 takes into account the partial and combination coefficients as well as the safety factor of the material.
- For the given values, the permissible steel stress and the maximum permissible deflection L/200 are not exceeded, taking the deadweight into consideration.