

## Mounting Block

Pre-fabricated, non-penetrative, mounting base for flat roofs

Material specifications	
<b>Material</b>	Recycled SBR
<b>Properties</b>	<b>Service Temperature:</b> -40 °C to +80 °C





### Applications

- Non penetrative installation of Pipes, ventilation ducts and cable trays on flat roofs

### Features & Benefits

- Quick and easy to Install
- Durable recycled rubber with increased stability
- Cost effective pre fabricated support systems
- Can be combined with other Fixotec support solutions for a complete and cost-effective package

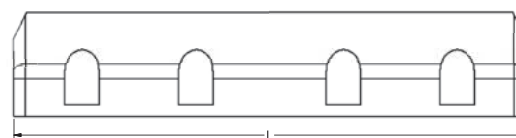

### Select Variant

Article No.	Product Description	L (mm)	W (mm)	H (mm)	Max. Recommended Load (N)
Galvanized (vz) 682100	FX Roof Block 250	250	183	100	1600
682110	FX Roof Block 400	400	183	100	2400
682120	FX Roof Block 600	600	183	100	4000
682130	FX Roof Block 1000	1000	183	100	6450

#### Note:

- A range of materials are used as insulation on flat roofs, and vary significantly in their compressive strength, which must be checked before installation on site.
- The load bearing capacity of the roof structure must be taken into consideration with the extra load of the equipment to be placed on the assembly.